

Big Tent 20M



Clear-span width

2000 cm

Side height

300 cm

Ridge height

625 cm

Roof pitch

18°

Bay distance

500 cm

Gable uprights

3 gable uprights (per end)

Longest component

1070 cm

Minimum tent length

2000 cm

Maximum tent length

No limit

Main profile

220 mm x 100 mm x 3 mm

Eave / corner connection

Slide connection with ridge strut

Max. allowed wind speed to DIN

100 km/h

Wind Load

0.5 kN/m²

Extension / lean-to options

Extension (max. span 400 cm, located anywhere, both sides, any length)

1/2 octagonal at gable end

Flooring options

Woodenfloor with timber or steel sub-construction

Aluminium cassettefloor with plywood or full aluminiumboards




Compactfloor

Cover

RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2

Special design

Spars with site joints permit the construction of a 15 m tent with the same frame components
By using compactfloor anchoring can be omitted
Portal beams can be used in place of cross struts

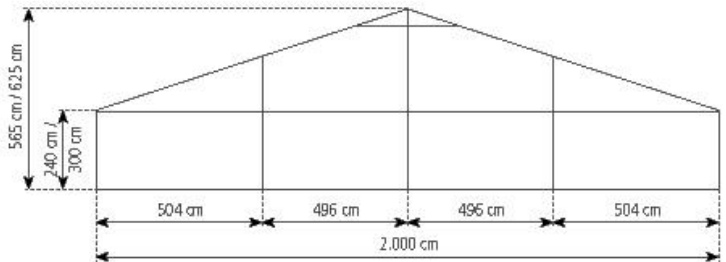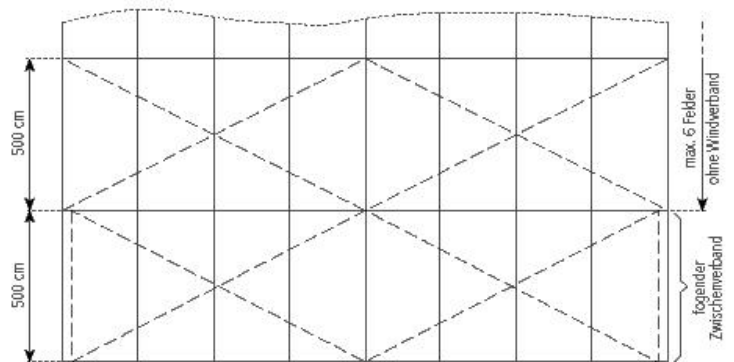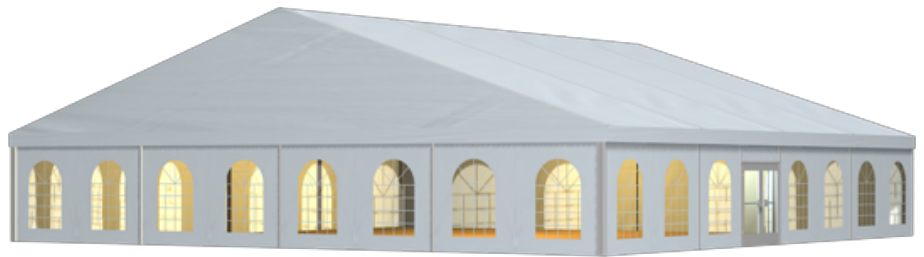

17.05.2012, www.r-zs.de/en/tents/pdf/63

RÖDER Zelt- und Veranstaltungsservice GmbH
63654 Büdingen
Fon: +49 06049 700-0
Am Lautenstein Fax: +49 06049 700-339
An den Ellern Fon: +49 06049 700-309
HRB 3261, Friedberg UST.-IdNr.: DE 112607812

Geschäftsführer:
Rüdiger Blasius
Jens Brüggemann
Thomas Roman
St.-Nr.: 020 225 62014

Bank:
WGZ Bank eG
KBC Bank DTLD AG
Duns-Nr.: 32-239-9494

IBAN BLZ Konto
DE73 400 600 00 0000 772 633
DE86 500 203 00 0000 295 086

info@r-zs.com

SWIFT/BIC
GENO DE MS
BANV DE HB 500

www.r-zs.com