

Big Tent 25M



Clear-span width

2500 cm

Side height

400 cm

Ridge height

800 cm

Roof pitch

18°

Bay distance

500 cm

Gable uprights

4 gable uprights (per end)

Longest component

1070 cm

Minimum tent length

2000 cm

Maximum tent length

No limit

Main profile

250 mm x 120 mm x 5/4 mm

Eave / corner connection

Clevic-plate connection with corner and ridge strut

Max. allowed wind speed to DIN

130 km/h

Wind Load

0.8 kN/m²

Extension / lean-to options

Extension (max. span 500 cm located anywhere, both sides, any length)

Flooring options

Woodenfloor with timber and steel sub-construction



Aluminium cassettefloor with plywood or full aluminiumboards

Cover

RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2

Special design

Portal beams can be used in place of cross struts

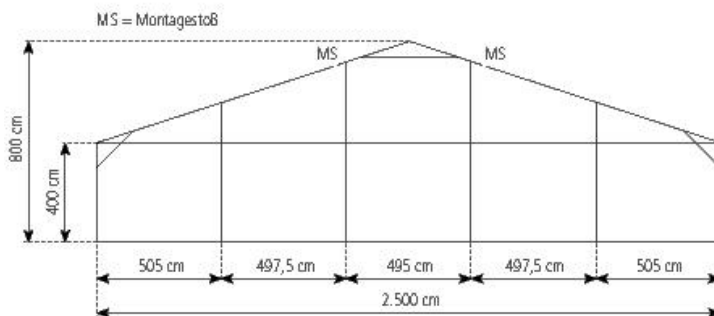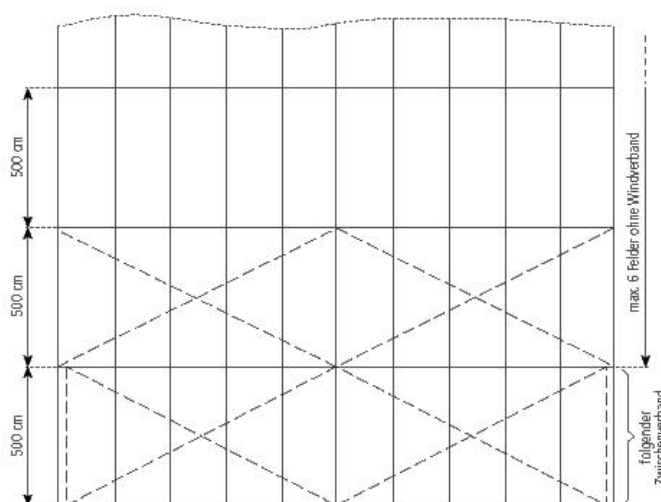

17.05.2012, www.r-zs.de/en/tents/pdf/71

RÖDER Zelt- und Veranstaltungsservice GmbH
63654 Büdingen
Verkauf: Am Lautenstein
Vermietung: An den Ellern
HRB 3261, Friedberg
Fon: +49 06049 700-0
Fax: +49 06049 700-339
Fon: +49 06049 700-309
UST.-IdNr.: DE 112607812

Geschäftsführer:
Rüdiger Blasius
Jens Brüggemann
Thomas Roman
St.-Nr.: 020 225 62014

Bank:
WGZ Bank eG
KBC Bank DTLD AG
Duns-Nr.: 32-239-9494

IBAN BLZ Konto
DE73 400 600 00 0000 772 633
DE86 500 203 00 0000 295 086
info@r-zs.com

SWIFT/BIC
GENO DE MS
BANV DE HB 500
www.r-zs.com