Party Tent Bodega® SP 3M/4M

Clear-span width
300-400 cm

Side height
229 cm

Ridge height
300 cm

Roof pitch
25°

Bay distance
300 cm

Longest component
220 cm

Minimum tent length
600 cm

Maximum tent length
No limit

Main profile
81 mm x 48 mm x 3 mm (optional 94 mm x 48 mm x 3 mm)

Eave / corner connection
Internal eave insert

Max. allowed wind speed to DIN
80 km/h

Wind Load
0.3 kN/m²

Flooring options
Woodenfloor with timber or steel sub-construction
Aluminium cassettefloor with plywood or full aluminiumboards
Compactfloor

Cover
RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2

Special design
By using compactfloor or woodenfloor with steel sub-construction and weights anchoring can be omitted
Portal beams can be used in place of cross struts

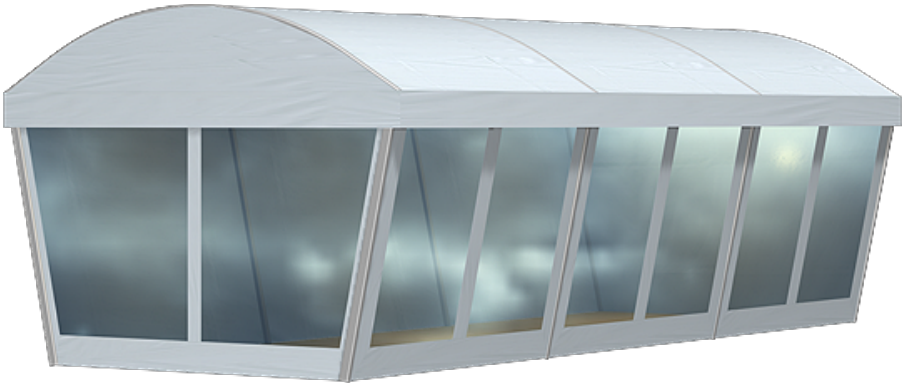

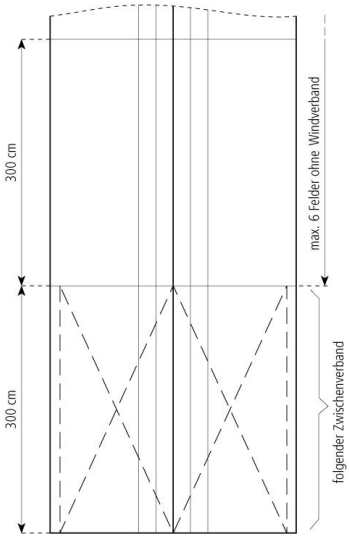

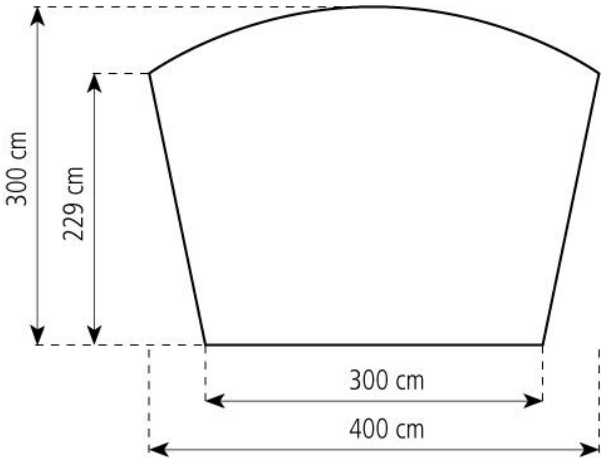

18.05.2012, www.r-zs.de/en/tents/pdf/209