

Party Tent Highlight 4M

Clear-span width

400 cm

Side height

229 cm

Ridge height

322 cm

Highest point

458 cm

Roof pitch

20°

Longest component

400 cm

Main profile

81 mm x 48 mm x 3 mm (optional 94 mm x 48 mm x 3 mm)

Eave / corner connection

Internal eave insert

Max. allowed wind speed to DIN

80 km/h

Wind Load

0.3 kN/m²

Extension / lean-to options

By using rain gutters can be connected to further tents of the same design in any form and to any length (up to 72 m²)

Flooring options

Woodenfloor with timber and steel sub-construction

Aluminium cassetefloor with plywood or full aluminiumboards

Cover



RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2

Special design

By using woodenfloor with steel subconstruction and weights anchoring can be omitted

Note

With this type of tent a height balancing adjustment of the beams of ca. 10 cm is possible

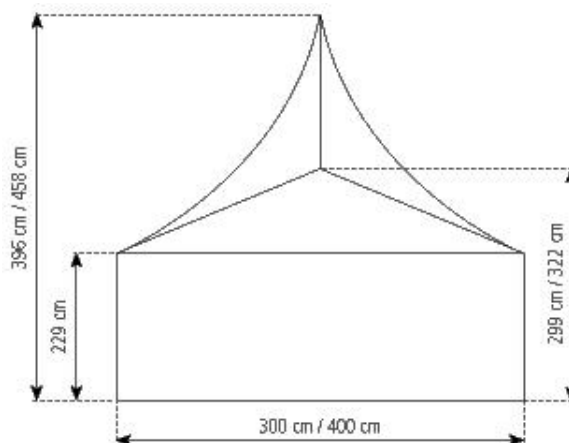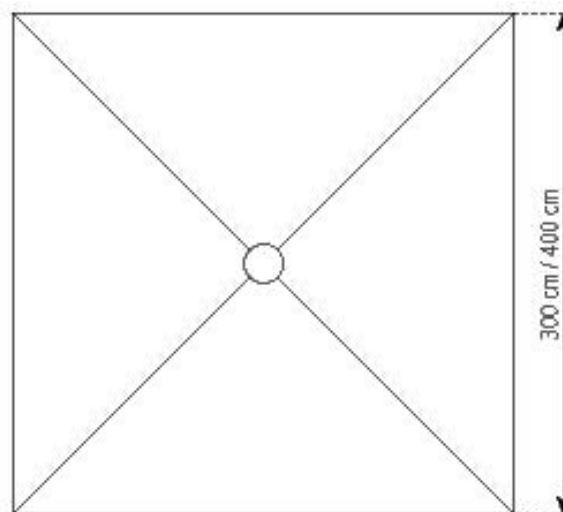

21.05.2012, www.r-zs.de/en/tents/pdf/29