

# Party Tent Holiday 4M



## Clear-span width

400 cm

## Side height

230 cm

## Ridge height

295 cm

## Roof pitch

18°

## Bay distance

300/500 cm

## Longest component

385/549 cm

## Minimum tent length

300/500 cm

## Maximum tent length

No limit

## Main profile

110 mm x 68 mm x 3 mm

## Eave / corner connection

Internal eave insert

## Max. allowed wind speed to DIN

80 km/h

## Wind Load

0.3 kN/m<sup>2</sup>

## Extension / lean-to options

Extension (max. span 300 cm located anywhere, both sides, any length),  
1/2 hexagonal at gable end

## Flooring options



Woodenfloor with timber or steel sub-construction  
Aluminium cassettefloor with plywood or full aluminiumboards  
Compactfloor

## Cover

RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2

## Special design

Portal beams can be used in place of cross struts  
By using woodenfloor with steel sub-construction and weights anchoring can be omitted  
By using compactfloor anchoring can be omitted

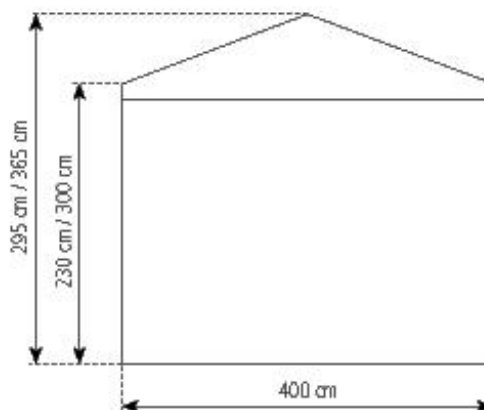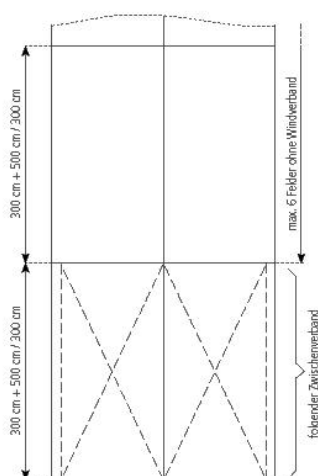

21.05.2012, [www.r-zs.de/en/tents/pdf/21](http://www.r-zs.de/en/tents/pdf/21)

RÖDER Zelt- und Veranstaltungsservice GmbH  
63654 Büdingen  
Fon: +49 06049 700-0  
Fax: +49 06049 700-339  
Am Lautenstein  
Fon: +49 06049 700-309  
An den Ellern  
HRB 3261, Friedberg  
UST.-IdNr.: DE 112607812

Geschäftsführer:  
Rüdiger Blasius  
Jens Brüggemann  
Thomas Roman  
St.-Nr.: 020 225 62014

Bank:  
WGZ Bank eG  
KBC Bank DTLD AG  
Duns-Nr.: 32-239-9494

IBAN BLZ Konto  
DE73 400 600 00 0000 772 633  
DE86 500 203 00 0000 295 086  
info@r-zs.com

SWIFT/BIC  
GENO DE MS  
BANV DE HB 500  
www.r-zs.com