

# Special Tent Curve tent Medium 5M

**Clear-span width**

500 cm

**Side height**

240 cm

**Ridge height**

395 cm

**Roof pitch**

25°

**Bay distance**

500 cm

**Longest component**

556 cm

**Minimum tent length**

500 cm

**Maximum tent length**

No limit

**Main profile**

130 mm x 70 mm x 3 mm

**Eave / corner connection**

Internal eave insert

**Max. allowed wind speed to DIN**

80 km/h

**Wind Load**0.3 kN/m<sup>2</sup>**Flooring options**

Wooden floor with timber or steel

sub-construction

Aluminium cassette floor with plywood or full

aluminium boards

Compact floor

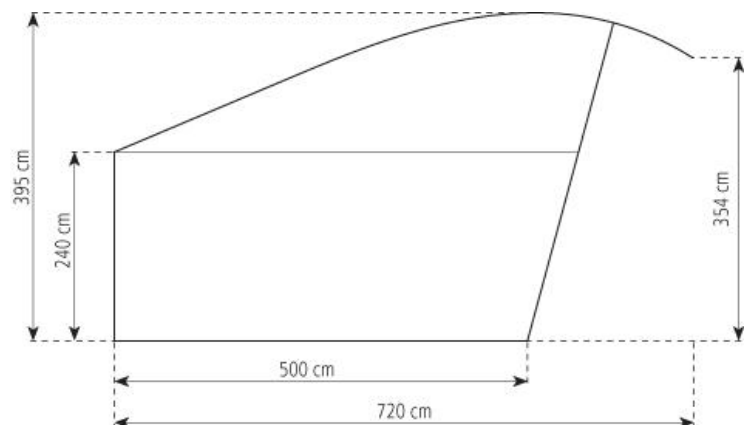
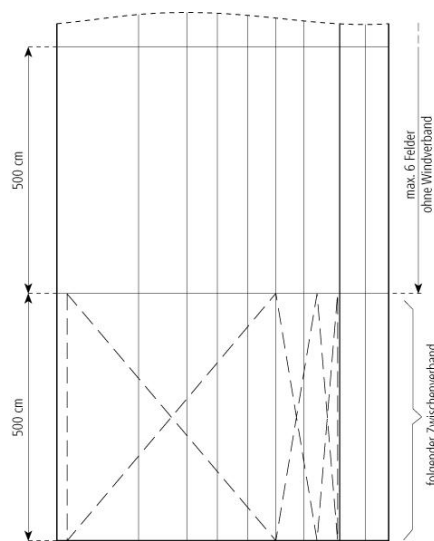
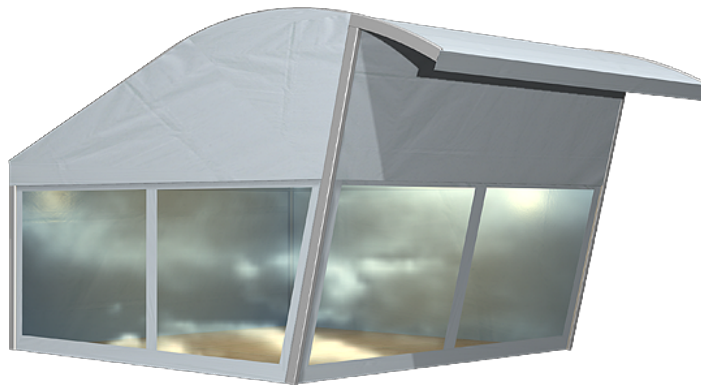
**Cover**

RÖDER No. 1: PVC-coated polyester textile,

flame retardant to DIN 4102 B1, M2

**Special design**Portal beams can be used in place of cross  
struts

By using compact floor anchoring can be omitted

22.05.2012, [www.r-zs.de/en/tents/pdf/213](http://www.r-zs.de/en/tents/pdf/213)

RÖDER Zelt- und Veranstaltungsservice GmbH  
63654 Büdingen Fon: +49 06049 700-0  
Verkauf: Am Lautenstein Fax: +49 06049 700-339  
Vermietung: An den Ellern Fon: +49 06049 700-309  
HRB 3261, Friedberg UST.-IdNr.: DE 112607812

Geschäftsführer:  
Rüdiger Blasius  
Jens Brüggemann  
Thomas Roman  
St.-Nr.: 020 225 62014

Bank:  
WGZ Bank eG  
KBC Bank DTLD AG  
Duns-Nr.: 32-239-9494

IBAN BLZ Konto  
DE73 400 600 00 0000 772 633  
DE86 500 203 00 0000 295 086

SWIFT/BIC  
GENO DE MS  
BANV DE HB 500  
info@r-zs.com www.r-zs.com