

# Storage Tent H-Line 10M



## Clear-span width

1000 cm

## Side height

520 cm

## Ridge height

694 cm

## Roof pitch

18°

## Bay distance

500 cm

## Gable uprights

2 gable uprights (per end)

## Longest component

654 cm

## Minimum tent length

1000 cm

## Maximum tent length

No limit

## Main profile

252 mm x 122 mm x 4 mm

## Eave / corner connection

Internal eave insert

## Max. allowed wind speed to DIN

100 km/h

## Wind Load

0.5 kN/m<sup>2</sup>

## Snow load

0.75 kN/m<sup>2</sup>

## Cover




RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2, or inflated textile iso-roof

## Special design

Portal beams can be used in place of cross struts

## Trapezoidal metal sheets

Strip-galvanized, exterior color coating RAL 9002 (grey-white), protective paint coating inside  
iso-sandwich elements

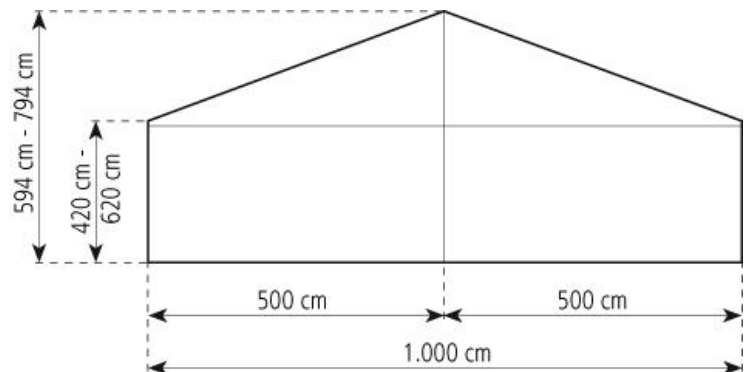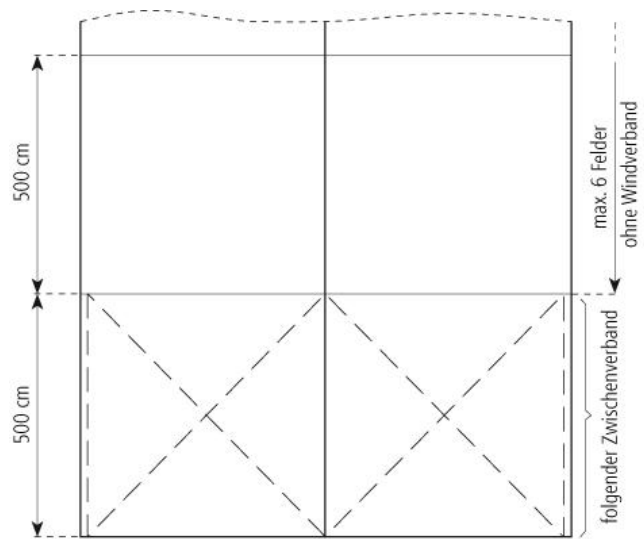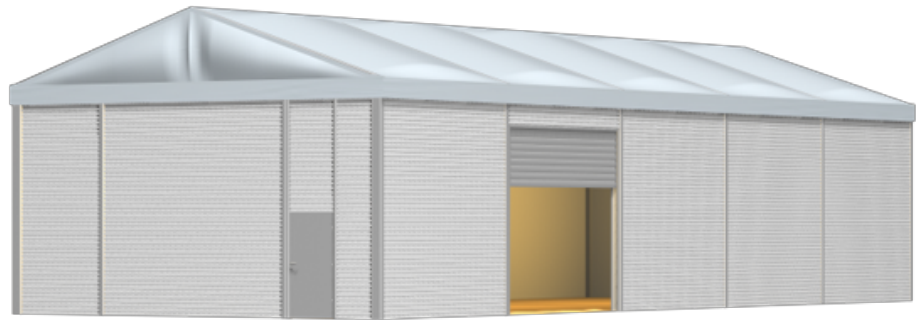

22.05.2012, [www.r-zs.de/en/tents/pdf/139](http://www.r-zs.de/en/tents/pdf/139)

RÖDER Zelt- und Veranstaltungsservice GmbH  
63654 Büdingen  
Fon: +49 06049 700-0  
Am Lautenstein  
Fax: +49 06049 700-339  
An den Ellern  
Fon: +49 06049 700-309  
HRB 3261, Friedberg  
UST.-IdNr.: DE 112607812

Geschäftsführer:  
Rüdiger Blasius  
Jens Brüggemann  
Thomas Roman  
St.-Nr.: 020 225 62014

Bank:  
WGZ Bank eG  
KBC Bank DTLD AG  
Duns-Nr.: 32-239-9494

IBAN BLZ Konto  
DE73 400 600 00 0000 772 633  
DE86 500 203 00 0000 295 086

SWIFT/BIC  
GENO DE MS  
BANV DE HB 500

[info@r-zs.com](mailto:info@r-zs.com)

[www.r-zs.com](http://www.r-zs.com)