

Wine Tent 10M



Clear-span width

1000 cm

Side height

300 cm

Ridge height

482 cm

Roof pitch

20°

Bay distance

500 cm

Gable uprights

1 gable upright (per end)

Longest component

538 cm

Minimum tent length

1000 cm

Maximum tent length

No limit

Main profile

130 mm x 70 mm x 3 mm

Eave / corner connection

Internal eave insert

Max. allowed wind speed to DIN

100 km/h

Wind Load

0.5 kN/m²

Extension / lean-to options

Extension (max. span 300 cm located anywhere, both sides, any length), 1/2 octagonal with intermediate bays, one or both sides with Giga tents

Flooring options

Woodenfloor with timber or steel sub-construction
Aluminium cassetefloor with plywood or full aluminiumboards
Compactfloor



Cover

RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2

Special design

Portal beams can be used in place of cross struts

By using compactfloor anchoring can be omitted

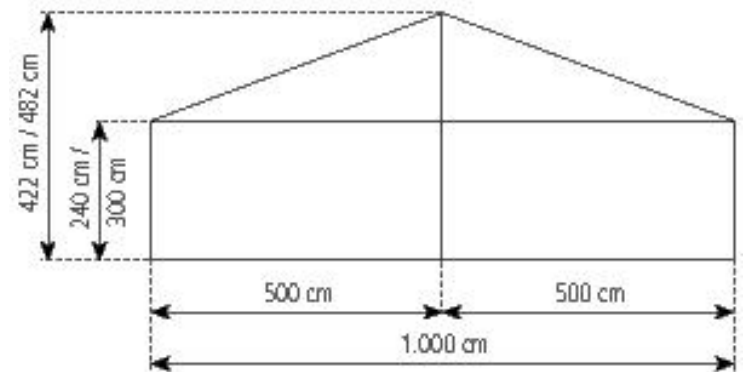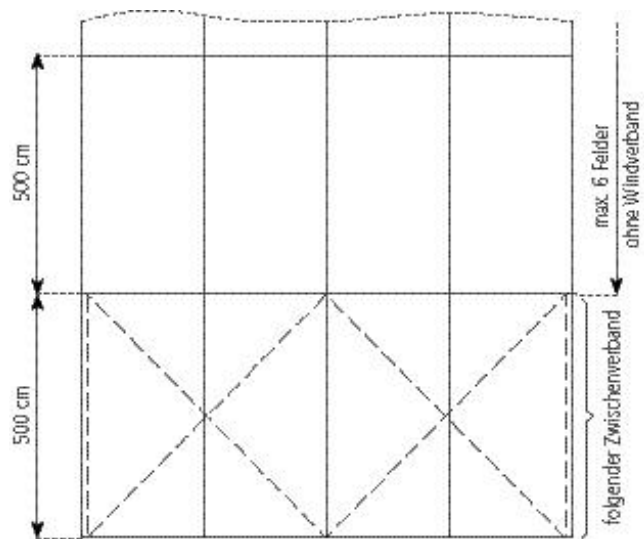

09.02.2012, www.r-zs.de/en/tents/pdf/54

RÖDER Zelt- und Veranstaltungsservice GmbH
63654 Büdingen
Fon: +49 06049 700-0
Am Lautenstein
Fax: +49 06049 700-339
An den Ellern
Fon: +49 06049 700-309
HRB 3261, Friedberg
UST.-IdNr.: DE 112607812

Geschäftsführer:
Rüdiger Blasius
Jens Brüggemann
Thomas Roman
St.-Nr.: 020 225 62014

Bank:
WGZ Bank eG
KBC Bank DTLD AG
Duns-Nr.: 32-239-9494

IBAN BLZ Konto
DE73 400 600 00 0000 772 633
DE86 500 203 00 0000 295 086

SWIFT/BIC
GENO DE MS
BANV DE HB 500

info@r-zs.com

www.r-zs.com