

# Big Tent 20M



**Clear-span width**

2000 cm

**Side height**

400 cm

**Ridge height**

725 cm

**Roof pitch**

18°

**Bay distance**

500 cm

**Gable uprights**

3 gable uprights (per end)

**Longest component**

1070 cm

**Minimum tent length**

2000 cm

**Maximum tent length**

No limit

**Main profile**

220 mm x 100 mm x 4 mm

**Eave / corner connection**

Twin-pin connection with corner and ridge strut

**Max. allowed wind speed to DIN**

100 km/h

**Wind Load**

0.5 kN/m<sup>2</sup>

**Extension / lean-to options**

Extension (max. span 500 cm, located anywhere, both sides, any length)

1/2 octagonal at gable end

**Flooring options**

Woodenfloor with timber and steel sub-construction




Aluminium cassettefloor with plywood or full aluminiumboards

**Cover**

RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2

**Special design**

Portal beams can be used in place of cross struts

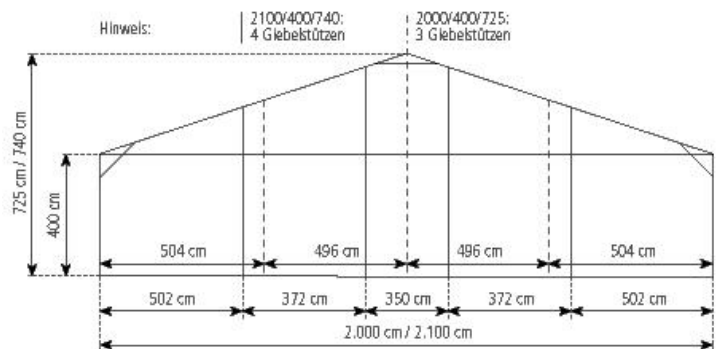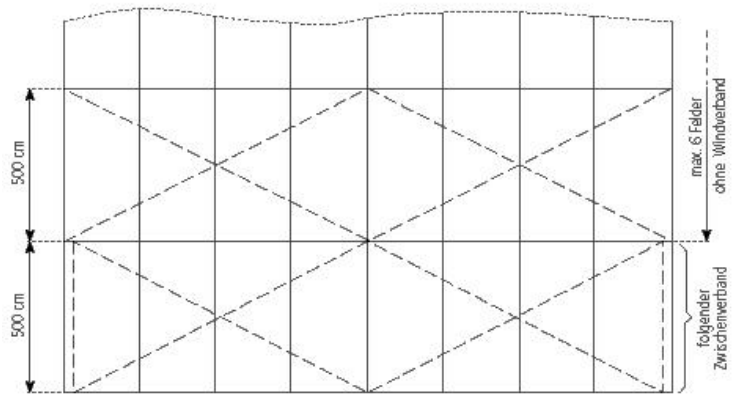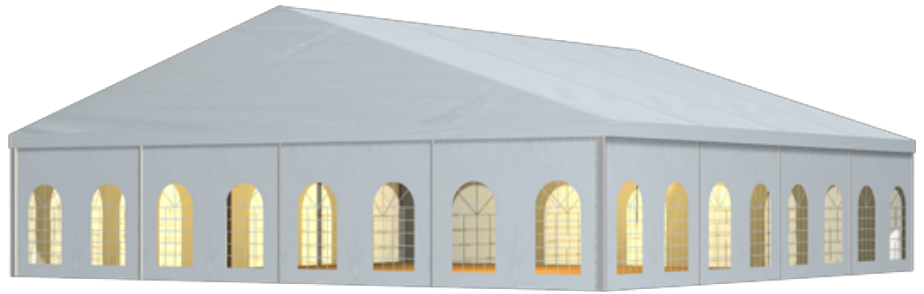

17.05.2012, [www.r-zs.de/en/tents/pdf/67](http://www.r-zs.de/en/tents/pdf/67)

RÖDER Zelt- und Veranstaltungsservice GmbH  
 63654 Büdingen Fon: +49 06049 700-0  
 Verkauf: Am Lautenstein Fax: +49 06049 700-339  
 Vermietung: An den Ellern Fon: +49 06049 700-309  
 HRB 3261, Friedberg UST.-IdNr.: DE 112607812

Geschäftsführer:  
 Rüdiger Blasius  
 Jens Brüggemann  
 Thomas Roman  
 St.-Nr.: 020 225 62014

Bank:  
 WGZ Bank eG  
 KBC Bank DTLG AG  
 Duns-Nr.: 32-239-9494

IBAN BLZ Konto  
 DE73 400 600 00 0000 772 633  
 DE86 500 203 00 0000 295 086  
 info@r-zs.com

SWIFT/BIC  
 GENO DE MS  
 BANV DE HB 500  
 www.r-zs.com