

# Big Tent Decagonal 25M



## Clear-span width

2500 cm

## Side height

300 cm

## Ridge height

700 cm

## Side length

772 cm

## Roof pitch

18°

## Longest component

1062 cm

## Main profile

220 mm x 100 mm x 4 mm

## Eave / corner connection

Slide connection with ridge strut

## Covered area

459 m<sup>2</sup>

## Max. allowed wind speed to DIN

100 km/h

## Wind Load

0.5 kN/m<sup>2</sup>

## Extension / lean-to options

Can also be arranged with intermediate bays (see big tent 2500/300/700)

## Flooring options

Aluminium cassettefloor with plywood or full aluminiumboards




Compactfloor

## Cover

RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2

## Special design

Spars with site joints permit the construction of a 20 m tent with the same frame components  
By using compactfloor anchoring can be omitted

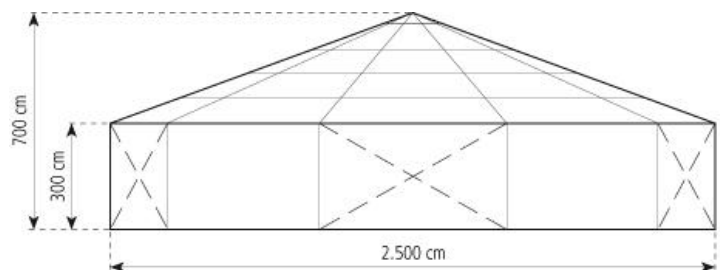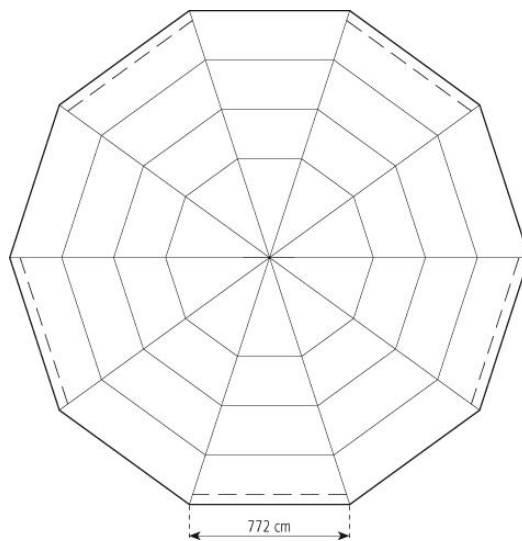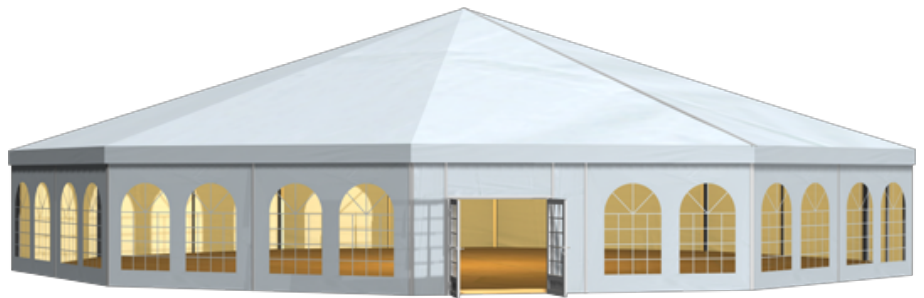

17.05.2012, [www.r-zs.de/en/tents/pdf/97](http://www.r-zs.de/en/tents/pdf/97)

RÖDER Zelt- und Veranstaltungsservice GmbH  
63654 Büdingen  
Fon: +49 06049 700-0  
Am Lautenstein  
Fax: +49 06049 700-339  
An den Ellern  
Fon: +49 06049 700-309  
HRB 3261, Friedberg  
UST-IdNr.: DE 112607812

Geschäftsführer:  
Rüdiger Blasius  
Jens Brüggemann  
Thomas Roman  
St.-Nr.: 020 225 62014

Bank:  
WGZ Bank eG  
KBC Bank DTLD AG  
Duns-Nr.: 32-239-9494

IBAN BLZ Konto  
DE73 400 600 00 0000 772 633  
DE86 500 203 00 0000 295 086

SWIFT/BIC  
GENO DE MS  
BANV DE HB 500

[info@r-zs.com](mailto:info@r-zs.com)

[www.r-zs.com](http://www.r-zs.com)